

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
1 April 2004 (01.04.2004)

PCT

(10) International Publication Number  
**WO 2004/027719 A1**

(51) International Patent Classification<sup>7</sup>: **G07D 7/12**

(21) International Application Number:  
PCT/IT2002/000594

(22) International Filing Date:  
17 September 2002 (17.09.2002)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicants (for all designated States except US):  
**O.R.M.A.G. S.P.A.** [IT/IT]; Via F. Baracca, 26, I-20090  
Novegro di Segrate (IT). **PARVIS SYSTEM AND  
SERVICES S.R.L.** [IT/IT]; Via Grandi, 10/A, I-37019  
Peschiera del Garda (IT).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **DE TONI, Gio-  
vanni** [IT/IT]; Viale G. Matteotti, 191, I-20099 Sesto san  
Giovanni (IT). **LISEI, Renzo** [IT/IT]; Via Bolivia, 36,

I-20037 Paderno Dugnano (IT). **RIPAMONTI, Maurizio**  
[IT/IT]; Via Fratelli Cervi, Res. Trefili S.N.C., I-20090  
Segrate (IT). **SALGARI, Roberto** [IT/IT]; Via Colombo  
Res. Tigli, 212, I-20080 Basiglio (IT).


(74) Agents: **FAGGIONI, Carlo, Maria et al.**; Fumero Stu-  
dio Consulenza Brevetti, Via S. Agnese, 12, I-20123 Milan  
(IT).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,  
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,  
VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: INSPECTING SYSTEM FOR SECURITY SUPPORTS

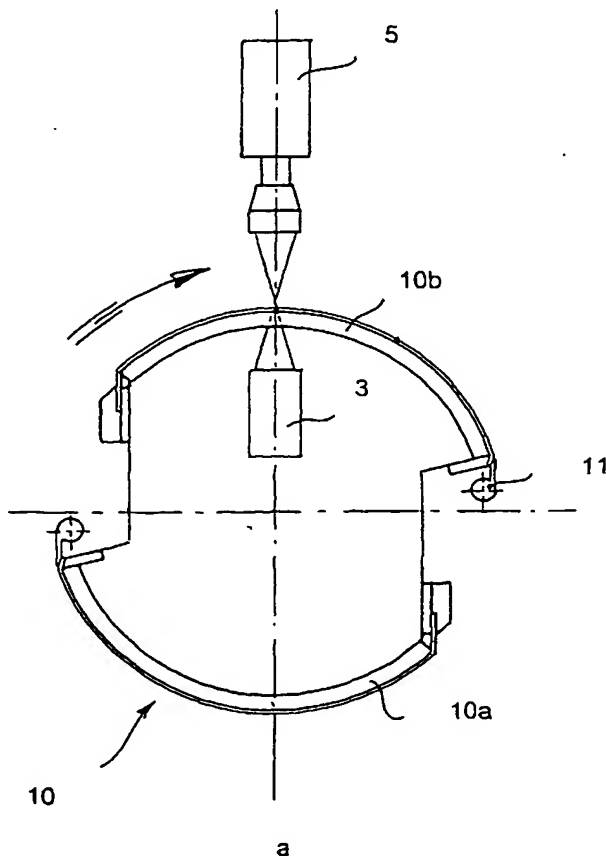

(57) Abstract: An inspecting system for security supports is disclosed, wherein a rotating cylinder provided with transparent sectors is apt to transport said support past an image acquiring device, and in which a transparency inspecting device is placed partially inside and partially outside the cylinder so that the electromagnetic inspecting beam is intercepted by said supports held lying onto said transparent sectors. Further, the inspecting system is provided with shading means, in the optical pattern, apt to define a cone of shade only in correspondence of sensitive elements of a camera.

BEST AVAILABLE COPY